
Smoke collar in circular duct LPSRTDE



Dimensions

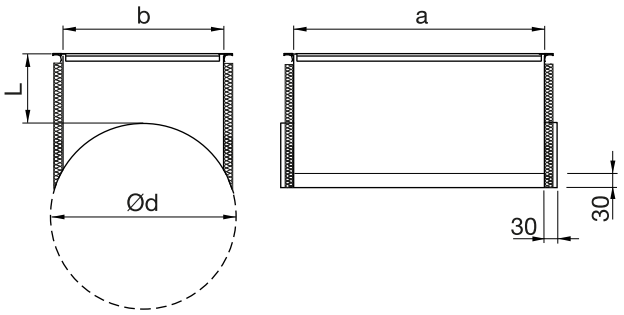

Insulation thickness: 25 mm

$Ød_{max}$	≤ 1000 mm
a_{max}	≤ 1250 mm
b	(b ≤ Ød)

Description

The collar connects to circular ducts. Trapeze corrugations stiffen the duct and reduce the risk of noise generation. Pre-wrapped 25 mm silver-coloured insulation insulates the outside of the product.

The rounded end has an edge for fixing with blind rivets or self-tapping screws. The rectangular end has joining profiles of 30 mm flange.

Other lengths are also available.

The product is CE marked according to EN 12101-7 and used in a rectangular smoke control system - multi compartment (see Declaration of Performance).

Classification according to EN13501-4	
250×250 to 1250×1000 mm	EI60 (h_o, v_e) S 1500Pa Multi

Classification according to EN13501-3	
250×250 to 1250×1000 mm	EI120 (h_o, v_e, o>i) S

Order code

Product	LPSRTDE
Side a	600
Side b	300
Diameter Ød	400
Length L	100

Order example: LPSRTDE-600-300-400-100