



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

Lindab Plenum box - CBC, CBE

Lindab Ventilation AB

EPD HUB, HUB-0954

Published on 01.03.2026, last updated on 01.03.2026, valid until 01.03.2031

Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1.



Created with One Click LCA

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Lindab Ventilation AB
Address	Na Hurce 1081/6, Prague, Czech Republic
Contact details	lindab@lindab.com
Website	https://www.lindab.com

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR Version 1.2, 24 Mar 2025
Sector	Construction product
Category of EPD	Third party verified EPD
Parent EPD number	-
Scope of the EPD	Cradle to gate with options, A4-A5, and modules C1-C4, D
EPD author	Kerstin Bergström
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited

This EPD is intended for business-to-business and/or business-to-consumer communication. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT

Product name	Lindab Plenum box - CBC, CBE
Additional labels	CBC, CBE
Product reference	CBC 160 200
Place(s) of raw material origin	Europe
Place of production	Prague, Czech Republic
Place(s) of installation and use	Europe
Period for data	Calendar year 2024
Averaging in EPD	Multiple products
Variation in GWP-fossil for A1-A3 (%)	<10%
GTIN (Global Trade Item Number)	-
NOBB (Norwegian Building Product Database)	-
A1-A3 Specific data (%)	81,9

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 kg of Compact box (CBC-/CBE)
Declared unit mass	1 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	4,33
GWP-total, A1-A3 (kgCO ₂ e)	3,4
Secondary material, inputs (%)	6,87
Secondary material, outputs (%)	78,2
Total energy use, A1-A3 (kWh)	17,3
Net freshwater use, A1-A3 (m ³)	0,04

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Lindab is a leading ventilation company in Europe, offering solutions for energy-efficient ventilation and a healthy indoor climate. The products are characterised by high quality, ease of installation and environmental thinking. In northern Europe, Lindab also offers an extensive range of roof, wall and rainwater systems.

FOR A BETTER CLIMATE

We want to create a better climate. Most of us spend a majority of our time indoors. The air we breathe, in our homes, at our workplaces and at school, affects our well-being. Since air is not visible, we do not always think about it. However, the indoor climate is crucial for how we feel, for our energy levels and whether we stay healthy. Lindab wants to contribute to the architecture and indoor climate of tomorrow. We also want a better climate for our planet. That is why we develop energy-efficient solutions for healthy indoor environments

OUR VISION

We want to be the leading player in the area in which we are strongest – ventilation in Europe. We focus on air distribution and air diffusion. Since we offer high-quality products, we focus on Europe where demand for good ventilation is high, and we can offer superior availability. We specialise in those parts of the ventilation system where we are the strongest. We adapt our offering to the local market, with our core ventilation offering as the clear common denominator in all markets.

THE IMPORTANCE OF VENTILATION

About 90 percent of the global population breathes poor air every day. A common misconception is that outdoor air is more polluted due to emissions, smog, and harmful chemicals. In fact, indoor air in homes, schools, offices, and factories can be as much as five times more polluted. People nonetheless spend most of their life indoors. The most common causes of indoor air pollution are mould, chemicals in, for example, furniture and building materials, dust, radon, and cigarette smoke but, above all, airborne particles from combustion and industrial processes, which are so small they can enter the human bloodstream via the respiratory system. Today, air pollution is a risk factor in several of the world's most common causes of death, including heart disease, pneumonia, stroke, diabetes, and lung cancer. Ventilation is an efficient and convenient method to remove those indoor air pollutants.

SUSTAINABILITY PLAN

For us, sustainability is a way of thinking and working. This affects how we work with Lindab's strategy in all areas. Everything from the purchases we make, to the deliveries and the service we offer our customers. Lindab has three long-term, non-financial targets for the business, one that focuses on increasing our attractiveness as an employer, one for reducing our own carbon dioxide emissions, and one for a better working environment.

Read more about Lindab Groups sustainability work and non-financial targets on www.lindabgroup.com

PRODUCT DESCRIPTION

CBC/CBE is a plenum box for supply (CBC) and extract air (CBE), intended to achieve a stable airflow into diffusers, air flow measurement and balancing and also to attenuate sound from the duct system. CBC/CBE is available with two damper options and has small overall dimensions to ease up installation and handling.

Damper type C and E are with rotating blade dampers for respectively supply and extract. Typically used in applications that don't require a high balancing pressure in the plenum box. The distribution filter is standard in the CBC box (supply version).

The products varies in size of duct inlets from dimension 100 to 315, and outlets 125-400.

Further information and product specific GWP calculations see additional document [EPD values Galvanized steel (file type: xlsx)] which is presented for each product on www.lindab.com/

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass %	Material origin
Metals	89,5	EU
Minerals	-	-
Fossil materials	10,5	EU
Bio-based materials	-	-

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	-
Biogenic carbon content in packaging, kg C	0,26

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 kg of Compact box (CBC-/CBE)
Mass per declared unit	1 kg
Functional unit	-
Reference service life	>50 years

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	ND	ND	ND	ND	ND	ND	ND	x	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction/ demolition	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = ND. Modules not relevant = MNR

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The steel raw material is received by Lindab Group's own steel service centre, Lindab Steel AB and afterwards transported to Production unit. Together with all other components the material is quality inspected at arrival to the manufacturing facility.

The product parts in steel are cut with a laser cut or punching machine (Waste from these processes is recycled). Parts are formed by pressing and bending. Some parts is welded (Connection, Box body and box side). The manufactured and purchased parts are assembled, by assembling rivet and sealing are used. For protection and transport, the units are protected with a mixture of plastic, cardboard and wooden pallets. Lubricating oil is used for the above machinery.

A market-based approach is used in modelling the electricity mix utilized in the factory. The use of green energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc.), and its use is ensured throughout the validity period of this EPD.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

Transport from production site to customer is calculated as an average of the 5 largest consumer countries weighted by revenue. Transportation to waste facility is assumed to be 50 km.

Activities related to packaging recycling are included and modelled based on a European scenario. Products are ready to be installed with no expected losses during the installation. Only handling of packaging material is included in the calculations. For installation, electric screwdriver and mounting equipment according to installation instructions is recommended.

PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase. These life cycle stages are dependent on how the product is used and should be developed and included as part of a holistic assessment of specific construction works.

The reference service life of the product is highly dependent on the conditions of use, average lifespan under normal conditions is minimum 50 years. This is an estimated value based on experience and scientific facts.

Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)


Energy (0,1kWh) for demounting is included in C1. The distance for transportation to disposal is assumed as 50 km and the transportation method is assumed to be lorry in C2. Activities related to recycling are included in C3 and C4 and modelled based on a European scenario. Recycling rates according to the following table below.

End of Life Scenarios (A3, A5, C1-C4, D)

Name	Recycling	Incineration	Landfill	Source
Steel	85		15	World Steel 2020
Aluminum	90		10	Eurostat 2020
Stainless steel	95		5	World Stainless 2024
Plastics & rubber	23	50	27	Plastics Europe, 2020
Cardboard	83	8	9	EUROSTAT, 2021
Plastic packaging	4	37	23	EUROSTAT, 2020
Wood packaging	32	30	38	EUROSTAT, 2020
Steel Packaging	81		19	EUROSTAT, 2020

Benefits and loads from recycling and recovery are included in module D. Benefits and loads in module D correspond to recycling and recovery rates modelled in packaging and product end of life modules A5 and C1-C4. Recycled raw material content has been subtracted from benefits and loads to avoid double counting. Benefits and loads do not include manufacturing losses or co-products from A3.

MANUFACTURING PROCESS

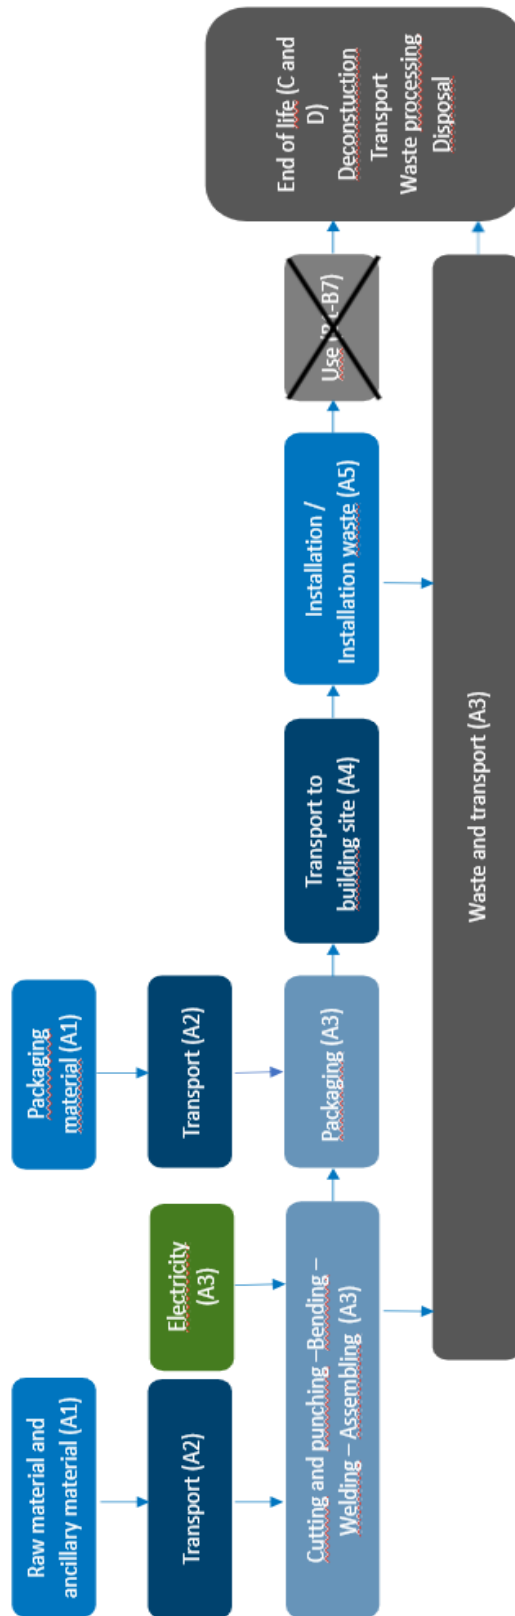

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging material	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	Multiple products
Grouping method	Based on a representative product
Variation in GWP-fossil for A1-A3, %	<10%

This EPD is represented by the most sold article CBC 160 200 and represents CBC and CBE box well. The products in the scope vary only in sizes and shapes. Production process, transportation, installation, demolition and waste treatment are the same for all products.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. The EPD Generator uses Ecoinvent v3.10.1 and One Click LCA databases as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, Cut-off, EN 15804+A2'.

World Steel, 2020, Plastics Europe, 2020, Eurostat:

https://ec.europa.eu/eurostat/databrowser/view/env_waspac__custom_8519259/default/table?lang=en

ENVIRONMENTAL IMPACT DATA

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	3,83E+00	2,35E-01	-6,69E-01	3,40E+00	1,57E-01	9,76E-01	ND	ND	ND	ND	ND	ND	ND	3,25E-02	9,72E-03	1,44E-01	4,83E-03	-1,24E+00
GWP – fossil	kg CO ₂ e	3,84E+00	2,35E-01	2,46E-01	4,33E+00	1,57E-01	1,74E-02	ND	ND	ND	ND	ND	ND	ND	3,24E-02	9,71E-03	1,44E-01	4,84E-03	-1,16E+00
GWP – biogenic	kg CO ₂ e	-1,69E-02	4,49E-05	-9,54E-01	-9,70E-01	3,27E-05	9,58E-01	ND	ND	ND	ND	ND	ND	ND	7,32E-05	2,10E-06	-3,89E-05	-2,54E-06	-7,80E-02
GWP – LULUC	kg CO ₂ e	1,16E-03	8,56E-05	3,83E-02	3,95E-02	5,96E-05	1,06E-05	ND	ND	ND	ND	ND	ND	ND	1,00E-04	4,21E-06	2,36E-05	7,36E-07	-3,84E-04
Ozone depletion pot.	kg CFC-11e	1,06E-06	4,57E-09	6,21E-09	1,07E-06	3,13E-09	1,28E-10	ND	ND	ND	ND	ND	ND	ND	5,61E-10	1,42E-10	2,58E-10	3,41E-11	-7,26E-09
Acidification potential	mol H ⁺ e	1,06E-02	1,20E-03	1,28E-03	1,31E-02	6,53E-04	4,54E-05	ND	ND	ND	ND	ND	ND	ND	1,65E-04	3,22E-05	2,26E-04	8,71E-06	-4,74E-03
EP-freshwater ²⁾	kg Pe	1,27E-04	1,50E-05	1,00E-04	2,42E-04	1,04E-05	2,23E-06	ND	ND	ND	ND	ND	ND	ND	2,89E-05	7,44E-07	1,16E-05	1,11E-07	-4,92E-04
EP-marine	kg Ne	2,39E-03	3,61E-04	4,49E-04	3,20E-03	2,08E-04	5,41E-05	ND	ND	ND	ND	ND	ND	ND	2,86E-05	1,05E-05	5,66E-05	3,20E-05	-1,01E-03
EP-terrestrial	mol Ne	2,50E-02	3,96E-03	4,16E-03	3,32E-02	2,27E-03	1,75E-04	ND	ND	ND	ND	ND	ND	ND	2,49E-04	1,14E-04	6,10E-04	3,59E-05	-1,09E-02
POCP (“smog”) ³⁾	kg NMVOC	8,83E-03	1,46E-03	1,61E-03	1,19E-02	9,22E-04	5,90E-05	ND	ND	ND	ND	ND	ND	ND	8,24E-05	4,53E-05	1,77E-04	1,36E-05	-3,93E-03
ADP-minerals & metals ⁴⁾	kg Sbe	2,12E-04	7,27E-07	1,86E-06	2,14E-04	4,23E-07	3,61E-08	ND	ND	ND	ND	ND	ND	ND	7,22E-08	3,19E-08	1,23E-06	2,21E-09	-1,09E-05
ADP-fossil resources	MJ	4,50E+01	3,27E+00	4,20E+00	5,24E+01	2,26E+00	1,12E-01	ND	ND	ND	ND	ND	ND	ND	7,65E-01	1,36E-01	2,54E-01	2,90E-02	-1,26E+01
Water use ⁵⁾	m ³ e depr.	8,36E-01	1,56E-02	1,25E+00	2,10E+00	1,14E-02	3,15E-03	ND	ND	ND	ND	ND	ND	ND	1,98E-02	6,36E-04	7,82E-03	1,03E-04	-2,13E-01

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁶⁾	MJ	3,10E+00	5,42E-02	8,02E+00	1,12E+01	3,62E-02	-3,73E+00	ND	ND	ND	ND	ND	ND	ND	1,79E-01	1,92E-03	4,48E-02	3,37E-04	-4,66E-01
Renew. PER as material	MJ	0,00E+00	0,00E+00	8,37E+00	8,37E+00	0,00E+00	-8,37E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,89E-01
Total use of renew. PER	MJ	3,10E+00	5,42E-02	1,64E+01	1,95E+01	3,62E-02	-1,21E+01	ND	ND	ND	ND	ND	ND	ND	1,79E-01	1,92E-03	4,48E-02	3,37E-04	2,23E-01
Non-re. PER as energy	MJ	4,42E+01	3,27E+00	3,39E+00	5,08E+01	2,26E+00	-1,72E-01	ND	ND	ND	ND	ND	ND	ND	7,65E-01	1,36E-01	-2,50E+00	-1,35E+00	-1,28E+01
Non-re. PER as material	MJ	2,16E+00	0,00E+00	7,86E-01	2,95E+00	0,00E+00	-7,86E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	-1,52E+00	-6,38E-01	9,65E-01
Total use of non-re. PER	MJ	4,63E+01	3,27E+00	4,18E+00	5,38E+01	2,26E+00	-9,58E-01	ND	ND	ND	ND	ND	ND	ND	7,65E-01	1,36E-01	-4,03E+00	-1,99E+00	-1,18E+01
Secondary materials	kg	6,87E-02	1,49E-03	1,06E-01	1,76E-01	9,79E-04	1,08E-04	ND	ND	ND	ND	ND	ND	ND	8,22E-05	6,14E-05	3,75E-04	8,28E-06	5,89E-01
Renew. secondary fuels	MJ	9,53E-04	1,79E-05	2,56E-01	2,57E-01	1,20E-05	8,83E-07	ND	ND	ND	ND	ND	ND	ND	3,38E-07	7,80E-07	1,38E-05	1,65E-07	-8,33E-05
Non-ren. secondary fuels	MJ	2,22E-03	0,00E+00	0,00E+00	2,22E-03	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m ³	1,23E-02	4,25E-04	2,92E-02	4,19E-02	3,28E-04	-2,32E-04	ND	ND	ND	ND	ND	ND	ND	6,36E-04	1,81E-05	1,53E-04	-1,13E-04	-3,69E-03

6) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1,02E-01	4,65E-03	1,70E-02	1,23E-01	3,26E-03	1,05E-03	ND	ND	ND	ND	ND	ND	ND	1,74E-03	2,33E-04	2,75E-03	3,83E-05	-3,62E-01
Non-hazardous waste	kg	1,89E+00	9,61E-02	5,63E-01	2,55E+00	6,47E-02	4,35E-01	ND	ND	ND	ND	ND	ND	ND	1,42E-01	4,42E-03	1,11E-01	1,80E-01	-3,38E+00
Radioactive waste	kg	8,66E-04	9,87E-07	6,52E-06	8,73E-04	6,61E-07	1,01E-07	ND	ND	ND	ND	ND	ND	ND	5,49E-06	2,87E-08	5,28E-07	5,32E-09	2,89E-06

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	1,04E-04	0,00E+00	0,00E+00	1,04E-04	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	3,36E-02	0,00E+00	3,80E-01	4,14E-01	0,00E+00	1,23E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	7,82E-01	0,00E+00	0,00E+00
Materials for energy rec	kg	4,42E-05	0,00E+00	0,00E+00	4,42E-05	0,00E+00	0,00E+00	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	4,97E-05	0,00E+00	0,00E+00	4,97E-05	0,00E+00	3,33E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	5,90E-01	0,00E+00	0,00E+00
Exported energy – Electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,41E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	2,50E-01	0,00E+00	0,00E+00
Exported energy – Heat	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,92E-01	ND	ND	ND	ND	ND	ND	ND	0,00E+00	0,00E+00	3,40E-01	0,00E+00	0,00E+00

ENVIRONMENTAL IMPACTS – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁷⁾	kg CO ₂ e	3,85E+00	2,35E-01	2,85E-01	4,37E+00	1,57E-01	1,74E-02	ND	ND	ND	ND	ND	ND	ND	3,25E-02	9,72E-03	1,44E-01	4,84E-03	-1,16E+00

7) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013). In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated in line with the guidance of IES PCR 1.2.5 Annex 1. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

SCENARIO DOCUMENTATION

Manufacturing energy scenario documentation

Scenario parameter	Value
Electricity data source and quality	GO electricity 100 % hydro, supplied by Becour; Modelled with Electricity production, hydro, reservoir, non-alpine region, Czech Republic, Ecoinvent
Electricity CO ₂ e / kWh	0.006
District heating data source and quality	-
District heating CO ₂ e / kWh	-

Transport scenario documentation A4

Scenario parameter	Value
Fuel and vehicle type. Eg, electric truck, diesel powered truck	EURO5, truck 16-32 metric ton, diesel, 0,00441l/tkm Transport, freight, sea, ferry
Average transport distance, km	Truck 1127km Ferry 37 km
Capacity utilization (including empty return) %	50
Bulk density of transported products	-
Volume capacity utilization factor	1

Installation scenario documentation A5

Scenario information	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	Steel, 0,31 kg
Water use / m ³	0
Other resource use / kg	0
Quantitative description of energy type (regional mix) and consumption during the installation process / kWh or MJ	Market group for electricity, low voltage, Ecoinvent, 0.016 kWh
Waste materials on the building site before waste processing, generated by the product's installation (specified by type) / kg	0
Output materials (specified by type) as result of waste processing at the building site e.g. collection for recycling, for energy recovery, disposal (specified by route) / kg	Waste paperboard, materials for recycling, 0.066 kg Waste packaging paper, incineration with energy recovery, 0.0063 kg Waste packaging paper, landfill, 0.0071 kg Waste wood, materials for recycling, 0.054 kg Waste wood, incineration with energy recovery, 0.05 kg Waste wood, landfill, 0.064 kg
Direct emissions to ambient air, soil and water / kg	0

End of life scenario documentation

Scenario information	Value
Collection process – kg collected separately	1
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	0,7
Recovery process – kg for energy recovery	0,1
Disposal (total) – kg for final deposition	0,2
Scenario assumptions e.g. transportation	Transported 50 km by lorry

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15802+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.

The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

Verified tools

Tool verifier: Magaly Gonzalez Vazquez

Tool verification validity: 27 March 2025 - 26 March 2028

Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited
01.03.2026

