
T-piece

LTTRTDE



Dimensions

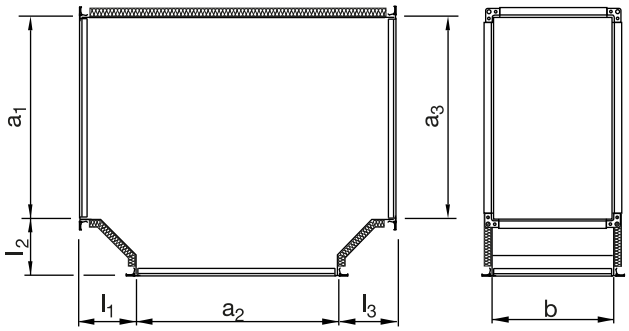

Insulation thickness: 25 mm

Description

T-piece. Trapeze corrugations stiffen the T-piece and reduce the risk of noise generation. Pre-wrapped 25 mm silver-coloured insulation insulates the outside of the product.

Has joining profiles of 30 mm flange.

Standard design $l_1 = l_2 = l_3 = 125$ mm.

Other leg lengths are also available.

The product is CE marked according to EN 12101-7 and used in a rectangular smoke control system – multi compartment (see Declaration of Performance).

Classification according to EN13501-4	
250×250 to 1250×1000 mm	EI90 (h_o, v_e) S 1500Pa Multi

Classification according to EN13501-3	
250×250 to 1250×1000 mm	EI120 (h_o, v_e, o>i) S

Order code

Product	LTTRTDE
Side a_1	600
Side a_2	800
Side a_3	600
Side b	400
Leg length l_1	125
Leg length l_2	125
Leg length l_3	125

Order example: LTTRTDE-600-800-600-400-125-125-125

Lindab reserves the right to make changes without prior notice.